


Gate Valve

Resilient Seated NRS Type-Groove-Groove-Ends

Fig.345GG

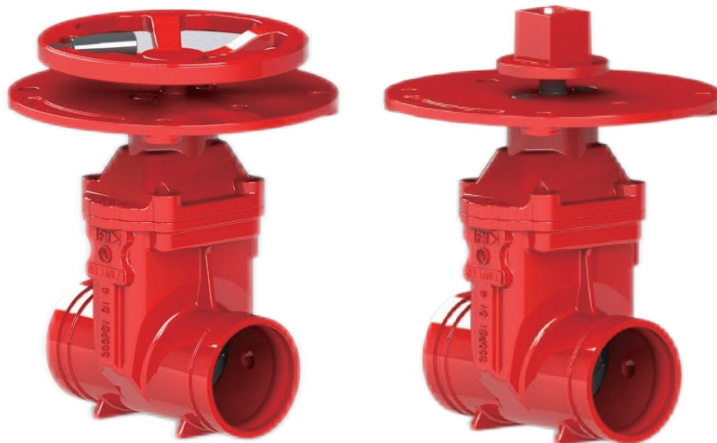

Handwheel OP

Square Nut OP

Valve Standard

Conforms to AWWA C515 / BS5163
Fusion bonded coating comply with AWWA C550

Working Pressure

365PSI

Working Temperature


-10°C to 120°C

Connection Ends

AWWA C 606
VDS2100/AS2638.2

Materials List

Part Name	Material	Specification
Body	Ductile Iron	A536 65-45-12
Wedge Disc	Ductile Iron EPDM Coated	
Disc Nut	Bronze	ASTM B62
Stem	Stainless Steel	AISI 304
Gasket	EPDM	Commercial
Bonnet	Ductile Iron	A536 65-45-12
Thrust Collar	Bronze	ASTM C51100
Gland	Ductile Iron	A536 65-45-12
Wrench Nut	Ductile Iron	A536 65-45-12
Post Plate	Ductile Iron	A536 65-45-12
Handle	Ductile Iron	A536 65-45-12

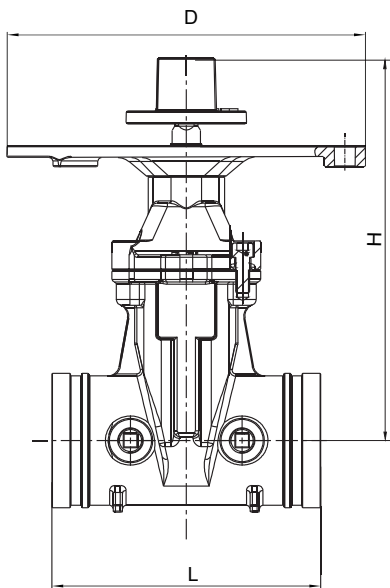

Dimensions(mm/inch)

Size	mm	50	65	80	100	125	150	200	250	300
	inch	2	2-1/2	3	4	5	6	8	10	12
L		178	191	203	229	254	267	292	330	356
H		263	263	293	326	420	420	506	610	711
D		305	305	305	305	305	305	305	305	305

Note: Subject to change without prior notice due to products optimization.